

Standpipe Piezometers

Model 601

The Solinst Model 601 Standpipe Piezometer is designed to be placed within a drilled hole to provide a filtered inlet point. The pointed PVC tip is also suitable for pushing into very loose sands at the base of a borehole, a stream, or into very loose tailings pond sediments.

The 601 is excellent for metals sampling, as it is composed of a preformed Vyon tube set inside a perforated PVC piezometer tip. The Model 601 is well suited for water level monitoring, permeability measurements, construction control, de-watering drainage operations, and slope stability investigations.


The 601 tip connects to the surface with 3/4" ID PVC riser pipe using slip-fit couplings. Reducer couplings can also be used to connect to other sizes of riser pipe or casing. The standard 601 Piezometer tip lengths available are: 6", 1 ft, 2 ft and 3 ft (15 cm, 30 cm, 60 cm and 90 cm).

Solinst also offers the Model 615 stainless steel Drive-Point Piezometer, which is designed to be pushed into the soil below the bottom of a borehole. They can also be driven directly into the ground from the surface. (See Model 601 Data Sheet for more information.)



Filter Specifications

- Porous HDPE (Vyon)
- Seams are butt heat welded
- Average pore size 60 microns
- Keeps out silts and fine sands

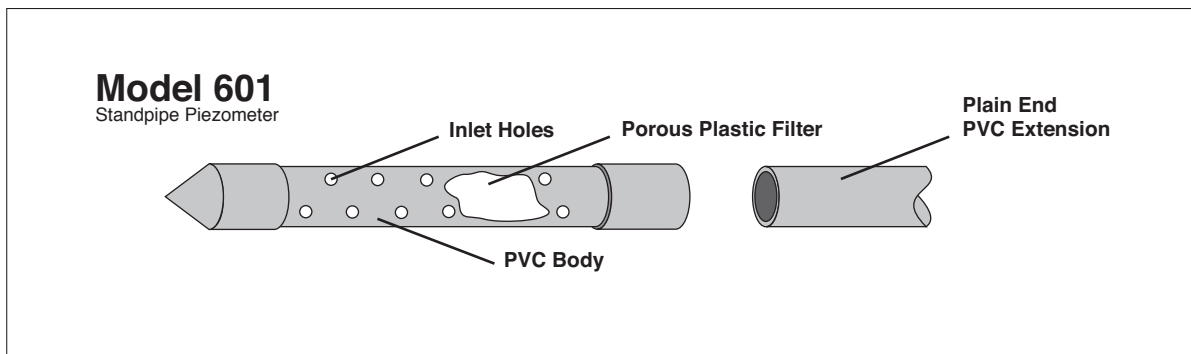

Applications

- Water level monitoring
- Permeability measurements
- Construction control
- De-watering and drainage operations
- Slope stability investigations
- Air Sparging: a 1 ft. Piezometer has 18 x 3/8" diameter holes i.e. 2 sq inches/ft.
- Metals Sampling

Advantages

- Reliable
- Low cost
- 60 micron filter element
- Rigid PVC housing protects Vyon filter installation

®Solinst is a registered trademark of Solinst Canada Ltd.

Printed in Canada
9/2003

For more information contact Equipco
Tel: +1 (888) 234-5678; +1 (925) 234-5678 Fax: +1 (925) 305-1300
2100 Meridian Park Boulevard, Concord, CA 94520

Web Site: www.equipcoservices.com E-mail: sales@equipcoservices.com

Solinst®